


Aquaworx

IPC-D Duplex Control Panel

The Aquaworx Intelligent Pump Controller (IPC) Panel provides an innovative approach to time controlled pumping. Designed specifically for the onsite industry, the IPC Panel uses floatless pressure transducer technology. The IPC Panel monitors liquid levels, controls pumping time intervals, and logs events using the MARC (Mountable and Removable Controller) as the user interface. The data logging capabilities of the IPC Panel enables monitoring of multiple types of system events, which enhances operational assessment troubleshooting, and maintenance of the onsite system. The IPC-D Panel operates two alternating pumps, a single pressure transducer located in a single pump tank.

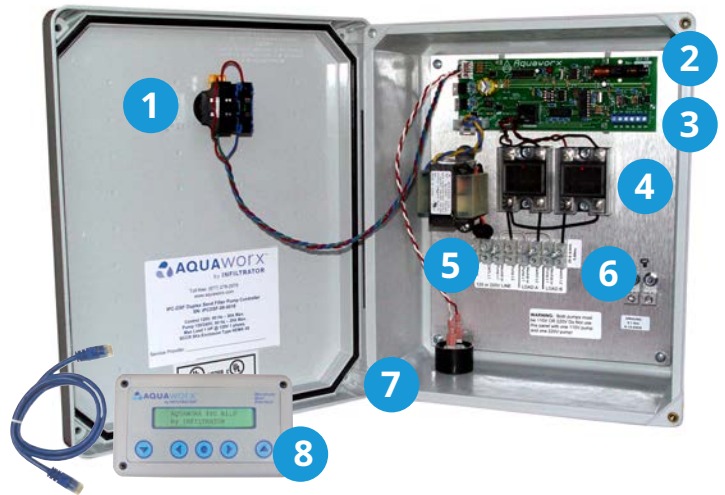

- | | |
|-----------------------------|------------------------|
| 1. Visual Alarm | 5. Transformer |
| 2. Microprocessor | 6. Wire Terminal Block |
| 3. Transducer Wire Terminal | 7. Audio Alarm |
| 4. Solid State Relays | 8. MARC Controller |

BENEFITS AND FEATURES

Floatless Transducer

Sensor mounted in pump chamber

- Simple 3-wire connection
- Reduces water tight connections in junction box
- Eliminates sewer gases in panel and crimped tubing

Veto Level Function

- Allows a programmable override

Data Logging

Date and time stamp for 4,000+ events

- Allows for system troubleshooting and timely diagnostics
- Allows design versus actual flow comparisons
- Identify water usage patterns

Easy Installation

- Only basic tools required: Screwdriver, pipe cutter, wirestripper, drill, step bit, tape measure

STANDARD SPECIFICATIONS

- Enclosure dimensions: 13.3"H x 11.3"W x 5.8"D
- Weight: 8.5 lbs
- 115 VAC, 20 FLA, 1-HP Max, single phase, 60Hz 220 VAC, 20 FLA, 2-HP Max, single phase, 60Hz
- NEMA 4X rated – constructed of UV-resistant fiberglass with stainless steel hinge
- Manual / Off / Auto Operation
- Audio / Visual Alarm – 95 decibel, with push to silence
- UL/cUL listed

- Built-in dose counter and pump run timer
- Solid-state relay
- Pressure transducer, liquid level sensing with no floats
- Transducer wire: 14-gauge, 3-wire connection (red, blue, black), rated for direct burial

Contact Infiltrator's Technical Services Department for assistance at
1-800-221-4436 or info@infiltratorwater.com

 **Infiltrator**[™]
Water Technologies
Part of **ADS**