
ATRIUM VENT FOR DESIGNS WITH TREATMENT CAPACITIES GREATER THAN 1,500 GPD, INSTALL EZsnap RISERS CONTACT INFILTRATOR FOR REVIEW. TO GRADE OPTIONAL SCHEDULE 40 PVC INSERT INSTALLED TO RAISE ECOPOD TO TO GRADE, TYP. ALTERNATE INLET AND OUTLET HEIGHT REQUIREMENTS. 80000 INSTALL TANKS PER INSTALLATION INSTRUCTIONS **LOCATION OUTLET PIPE 4" SCH 40** PVC, MIN 1% SLOPE

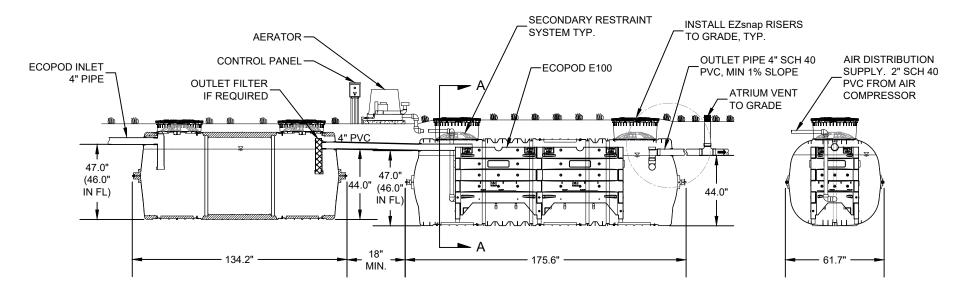

PRIMARY TANK CM-1060

SINGLE OR DUAL COMPARTMENT TANK AS REQUIRED PER CODE

REACTOR TANK IM-1530

SECTION VIEW

SECTION A-A

ELECTRICAL REQUIREMENTS		
TREATMENT PLANT	E100N	
AERATOR	IWT MODEL K03	
MOTOR FULL LOADS AMP	7.1	
MEASURED OPERATING WATTS	475	
ELECTRICAL REQUIREMENTS	115V - 1PH	

ECOPOD SPECIFICATIONS		
TREATMENT PLANT	E100N	
TREATMENT CAPACITY (GPD)	1,000	
MIN. PRIMARY TANK VOLUME (GAL.)	1,000	
REACTOR TANK VOLUME (GAL.)	1,405	
MEDIA SIZE	8' X 2' X 2'	
AIR REQUIREMENTS	24 CFM	



INFILTRATOR WATER TECHNOLOGIES, LLC

4 BUSINESS PARK RD, OLD SAYBROOK, CT 06475 WWW.INFILTRATORWATER.COM PHONE: (800) 221-4436 / EMAIL: INFO@INFILTRATORWATER.COM **ECOPOD-**N°

E100NIM

PART NO. E100N DATE 10/16/2025

SCALE 1:60 SHEET NO.

01 of 01