

Quick5 Standard Chambers

The Quick5 Standard Chamber fits in a 36" wide trench and is ideal for curved or straight systems. It features the atent-pending Contour Swivel Connection™ which permits turns up to 10°, right or left. The MultiPort™ endcap allows multiple piping options and eliminates pipe fittings. The chamber's five-foot length provides optimal installation flexibility.



Quick5 Standard 5
with MultiPort EndCap



Benefits

- Advanced contouring connections swivel up to 10°, right or left
- Latching mechanism allows for quick installation
- Five-foot chambers are easy to handle and install
- The Quick5 Standard Chamber supports wheel loads of 16,000 lbs/axle with only 12" of cover
- Certified by the International Association of Plumbing and Mechanical Officials (IAPMO)

MultiPort Endcap Benefits:


- Eight molded-in inlets/outlets allow for piping flexibility
- Eliminates pipe fittings
- Fits on either end of the Quick5 Standard Chamber

Quick5 Standard Chamber Specifications


Size	34"W x 65"L x 12"H (864 mm x 1651 mm x 305 mm)
Effective Length	60" (1524 mm)
Louwer Height	8" (203 mm)
Storage Capacity	56.5 gal (215 L)
Invert Height	8" (203 mm)

Contact Infiltrator's Technical Services
Department for assistance at 1-800-221-4436
or info@infiltratorwater.com


Quick5 Standard Chamber - Part Number Q5STD

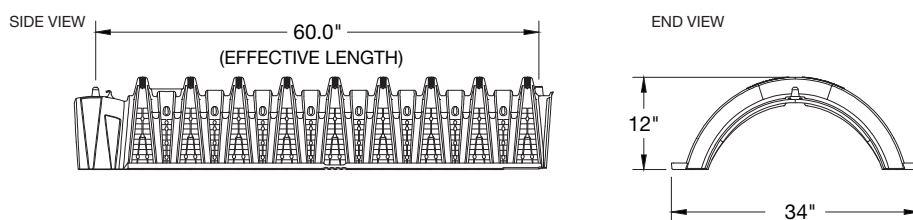

MultiPort EndCap

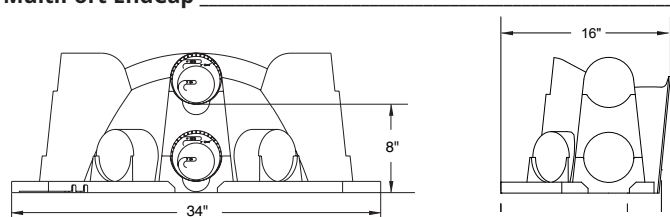

Typical Trench View

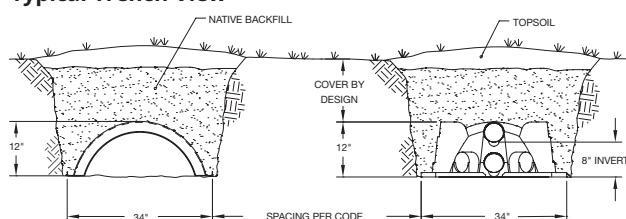

Scan QR Code
for Installation
Instructions