

EZsnap®

Risers - Precast

The EZsnap riser is designed to create an easy-to-assemble watertight riser system for septic tanks, pump tanks, and cisterns.

The EZsnap riser features click and lock technology eliminating the need for assembly tools, sealant/caulk and hardware. Easily cast into precast structures providing a secure watertight fit. The 24" diameter EZsnap riser is available in 2", 6" and 12" tall sections that nest together making for efficient storage and shipping.

2, 6 & 12 Inch Riser System

- A. 24" x 2" Risers (SNAPRIS-2402)
- B. 24" x 6" Risers (SNAPRIS-2406)
- C. 24" x 12" Risers (SNAPRIS-2412)
- D. 24" Lids (IMLID-2400)
- E. 24" Adapter Rings (SNAPAR-2400-2)
- F. 24" Safety Star (SNAPSAFT-2400)
- G. 24" Adapter Flange (ADF-2400)

Available in
Black or Green



Benefits

- Easy to Assemble
- No Tools or Adhesive
- Watertight - Gasketed Connection
- Nest Together for Efficient Shipping
- Available in 2, 6 and 12 Inch Heights
- Strong, Durable, Polypropylene Construction
- Secondary Safety Lid System

WATERTIGHT GASKET TO GASKET CONNECTION




 **Infiltrator™**
Water Technologies
Part of 


infiltratorwater.com • (800) 221-4436

EZsnap Riser System Sizes and Specifications

EZsnap Riser Specifications

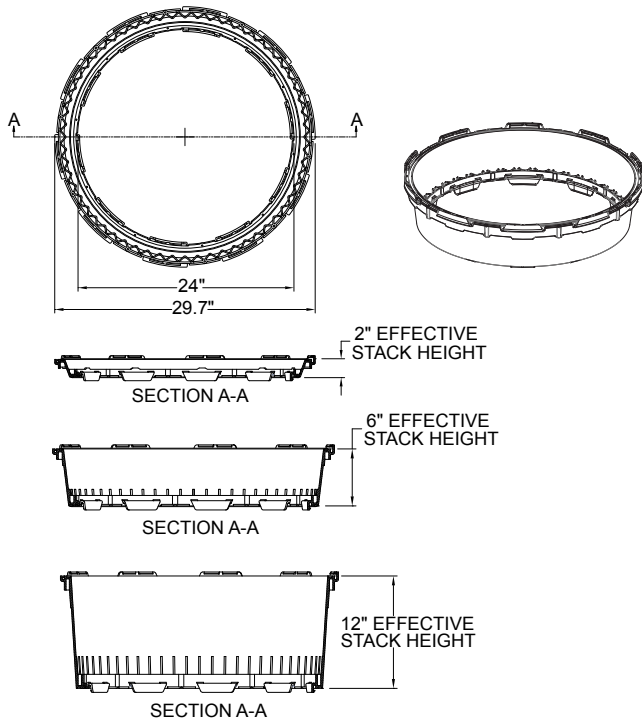


EZsnap 12" Lid Specifications

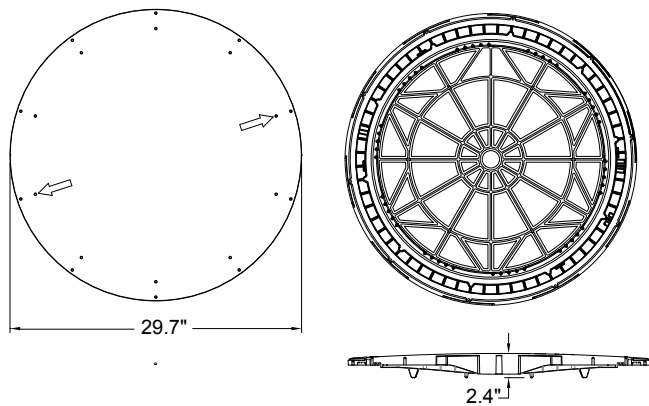


NOTE: A minimum 6-inch (150-mm) depth of suitable soil must be placed over the top of the tank. The balance of backfill placed to finish grade above the tank may be either suitable or unsuitable soil.


EZsnap Safety Star Specifications

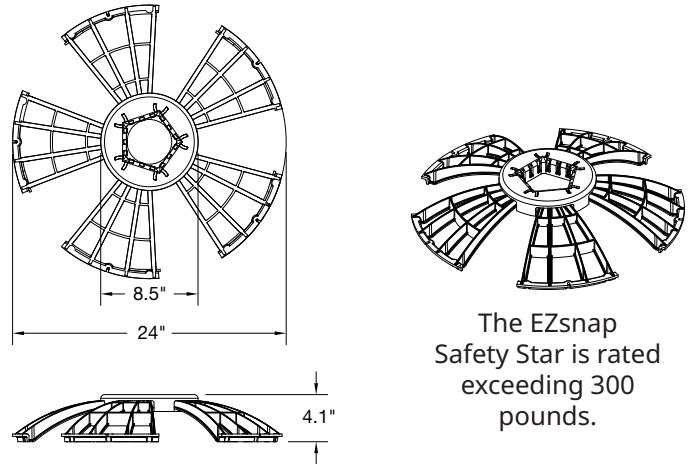

EZsnap Pipe Adapter Ring

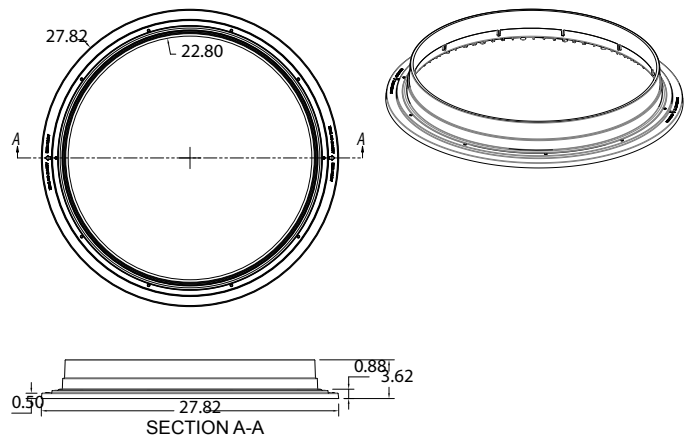

EZSnap Adapter Flange Specifications

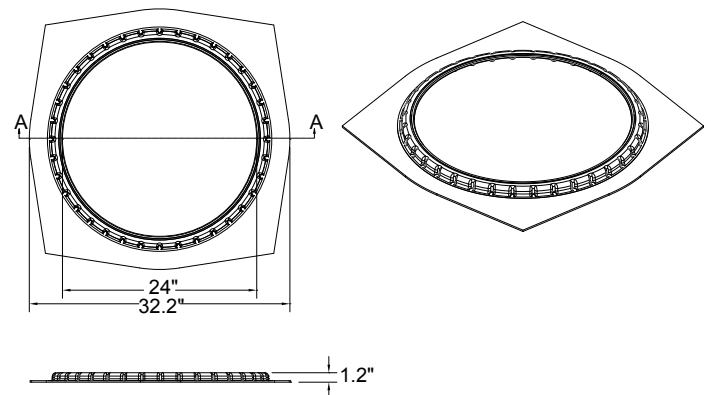

Contact Infiltrator's Technical Services Department for assistance at 1-800-221-4436 or info@infiltratorwater.com