# Quick4Plus Equalizer 36 Low Profile (LP)

## Chambers

The Quick4 Plus Equalizer 36 Low Profile (LP) offers maximum strength through its two center structural columns. This chamber can be installed in a 24-inch-wide trench. It is 4 inches shorter in height than other Equalizer 36 model chambers, allowing for shallower installation. Like the original line of Quick4 chambers, it offers advanced contouring capability with its Contour Swivel Connection<sup>™</sup>, which permits turns up to 15°, right or left. The Quick4 Plus All-in-One 8 and Quick4 Plus Endcaps provide increased flexibility in system design and configurations.


#### **Benefits**

- Low profile design makes this chamber ideal for shallow applications
- Reduces imported fill needed for cap and fill systems
- Two center structural columns offer superior strength
- Advanced contouring connections
- Four-foot chamber lengths are easy to handle and install
- Supports wheel loads of 16,000 lbs/axle with 12" of cover


#### **Quick4 Plus All-in-One Endcap Benefits**

- May be used at the end of chamber row for an inlet/outlet or can be installed mid-trench
- Mid-trench connection feature allows construction of chamber rows with center feed, as an alternative to inletting at the ends of chamber rows
- Center-feed connection allows for easy installation of serial distribution systems
- · Pipe connection options include sides, ends or top

#### Quick4 Plus Equalizer 36 Low Profile (LP) Chamber



Contact Infiltrator's Technical Services Department for assistance at 1-800-221-4436 or info@infiltratorwater.com

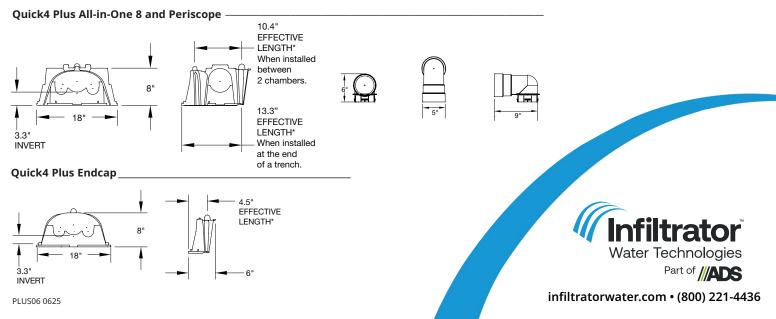



### Quick4 Plus All-in-One Periscope

- Allows for raised invert installations
- 180° directional inletting
- Raised invert is ideal for serial applications

Equalizer 36 Low Profile (LP) Specifications	
Size	22″W x 53″L x 8″H (559 mm x 1346 mm x 203 mm)
Effective Length	48" (1219 mm)
Louver Height	6.3" (160 mm)
Storage Capacity	20 gal (76 L)
Invert Height	3.3" (84 mm), 9.6" (244 mm)